



EnviroStar™

SATIN FLOOR COATING



EnviroStar Satin Floor Coating is an advanced floor coating designed to provide a highly durable satin coating for use in hospitals and nursing homes.

DIRECTIONS


Read all directions and Safety Data Sheets (SDS) before using.

1. For a floor that has been stripped, properly neutralized, rinsed and allowed to dry thoroughly, apply 2-3 thin coats using a clean synthetic mop. Allow the floor to dry thoroughly between coats.
2. For a floor that has been deep scrubbed and allowed to dry thoroughly, apply 1-2 thin coats using a clean synthetic mop. Allow floor to dry thoroughly between coats.

PRODUCT INFO

Product Code	125FS	125MPE
Volume	2.50 US gallons	4 liters
Shipping Package	2 x 2.5 gallons	4 x 4 liters
Pallet Quantity	48	48

SURFACES

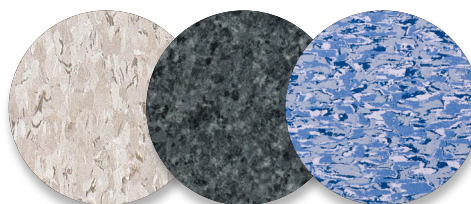

VCT

LINOLEUM

MARMOLEUM

TECHNICAL DATA

Description	Polymer emulsion
Appearance	Milky white
Specular Gloss (60°) ASTM D1455-87 (2008)	<35
Viscosity (Brookfield) @ 68°F (20°C)	<10 centipoise
Coverage Rate	2500 to 3000 ft ² /gal 61 to 74 m ² /liter
Dry Time	About 30 minutes
Buffability	Not required
Removability ASTM D1792-06	Good
VOC 40 CFR Part 59 Subpart C	0.89%
Non-Volatile Solids ASTM D2834-95 (2008)	16%
Fragrance	Faintly acetic (non-ammoniated)
Slip Resistance ULTM410	Meets requirements
Shelf Life ASTM D1791-93 (2008)	1 year
Density ASTM D1475-98 (2008)	8.5 lb/gal @ 68°F 1.02 kg/L @ 20°C
Detergent Resistance ASTM D3207-92 (2008)	Excellent
Freeze/Thaw ASTM D3209-93 (2008)	Passes 3 cycles
Container	2.5 US gal/9.5 L (FS packaging) 1.06 US gal/4 L (MPE packaging)

